


STREX MODULE

48V SYSTEM



1.0 DOT

LED 8.5W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.11kg IP20 $\text{Ra} \geq 0.3$ $\text{P} \leq 24^\circ$ UGR ≤ 19


non dim

CODE	
	171142W
	171142B

DALI dim

CODE	
	171145W
	171145B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	1000	>90	5



1.0 OPAL

LED 12.1W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.16kg IP20 $\text{Ra} \geq 0.3$ $\text{P} \leq 24^\circ$


non dim

CODE	
	171382W
	171382B

DALI dim

CODE	
	171385W
	171385B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>90	3
3000K	630	>90	5

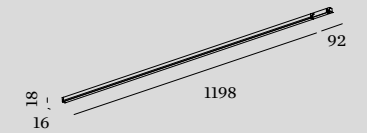

2.0 OPAL

LED 24.2W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.32kg IP20 $\text{Ra} \geq 0.3$ $\text{P} \leq 24^\circ$

non dim

CODE	
	171482W
	171482B

DALI dim

CODE	
	171485W
	171485B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1240	>90	3
3000K	1275	>90	5

