

Heracleum III Linear

BERTJAN POT




The Heracleum III Linear, available in three colours, is inspired by the flowering plant of the same name. Its bloom frozen in time. This new design in the Heracleum family is the brightest of all. It contains a new driver, making it compatible with our Wireless Wall Switch, and new LEDs; together they offer a higher light output that creates a warm glow. Don't confuse the new Heracleum III Linear with its Endless sibling. Look closely and you'll see blossoms gently sweeping upwards at either side, making the Heracleum III Linear perfect to hang above long surfaces, like your dining table or kitchen island. Like the other designs in the Heracleum family, the lean branches are powered by Electrosandwich, by Marcel Wanders studio.

Detailing




With its upward sweeping blossoms on either side, the Heracleum III Linear is perfect for intimate rectangular spaces.


Colours



Nickel




Copper



White

Heracleum III Linear / Linear

Dimensions

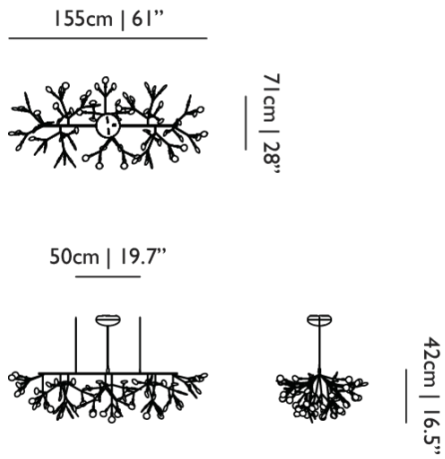

Product

WIDTH 155cm | 61"
HEIGHT 42cm | 16.5"
DEPTH 71cm | 28"
WEIGHT NETTO 2.2kg | 4.85lbs

Packaging

WIDTH 85cm | 33.5"
HEIGHT 55cm | 21.7"
CUBAGE 0.92m³ | 32.36ft³
LENGTH 196cm | 77.2"
WEIGHT 13kg | 28.66lbs

Technical CCC

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

72

INPUT VOLTAGE

120-250

FREQUENCY

50/60

MAX POWER CONSUMPTION

22W

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CANOPY

Pebble III Nickel Coated, ABS

COLOUR TEMPERATURE

2600 K

CRI

91

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1872 lm

DIMMING & LIGHTING CONTROL

DALI dt6, Push / Pulse dim on mains, Wireless Wall Switch

See last page for more information about the dimming possibilities.



Technical CE / cULus

MATERIAL

Metal wire frame, polycarbonate lenses, ultra thin suspension wire

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

72

INPUT VOLTAGE

120-250

FREQUENCY

50/60

MAX POWER CONSUMPTION

22W

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CANOPY

Pebble III in matching color

COLOUR TEMPERATURE

2600 K

CRI

91

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1872 lm

DIMMING & LIGHTING CONTROL

DALI dt6, Push / Pulse dim on mains, Wireless Wall Switch

See last page for more information about the dimming possibilities.



Dimming & Lighting Control

DALI dt6

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: Linear CCC, Linear CE, Linear cULus

Push / Pulse dim on mains

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for Mains Voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: Linear CCC, Linear CE, Linear cULus

Wireless Wall Switch

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: Linear CCC, Linear CE, Linear cULus
