


FLOS

03.9170.14A Black/White

Light Shadow Fixed Trim 12 Spots Optic Medium

NEW


Designed by FLOS Architectural, 2022

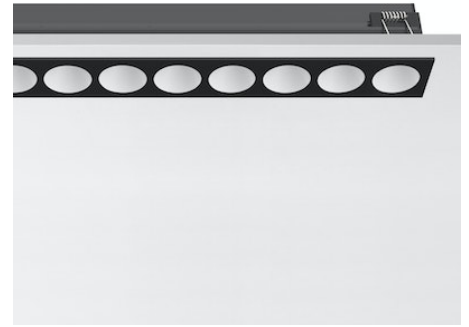

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

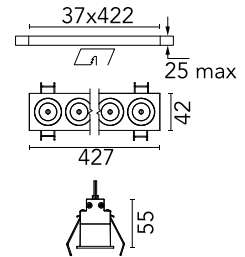

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Ilcos	No
Number of heads	1
Power (W)	32.4
Source flux (lm)	3420
System flux (lm)	2696

Physical

Colour	Black/White
Trim	Yes
Orientation	Fixed
Recessed depth (mm)	75
Length (mm)	427
Net weight (kg)	0.66
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[↓ ZIP](#) Bim



Schematic light drawing



Beam Angle: 22°

h(m)	E(lx)	D(m)
1	18024	0.39
2	4506	0.78
3	2003	1.17
4	1126	1.56
5	721	1.95

Luminous flux luminaire
2696 lm (EXTREME CUT OFF)

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	22
Beam angle C90-270 (°)	22

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220.00
Alternating current voltage (Vac)	230
LED voltage Vf (Vdc)	36
Driver	Remote included
Dimmable	No
Dimming type	Non Dimmable
Emergency type	No

Notes

Pre-installation frame not required.